


LEADER PF 2 PLUS

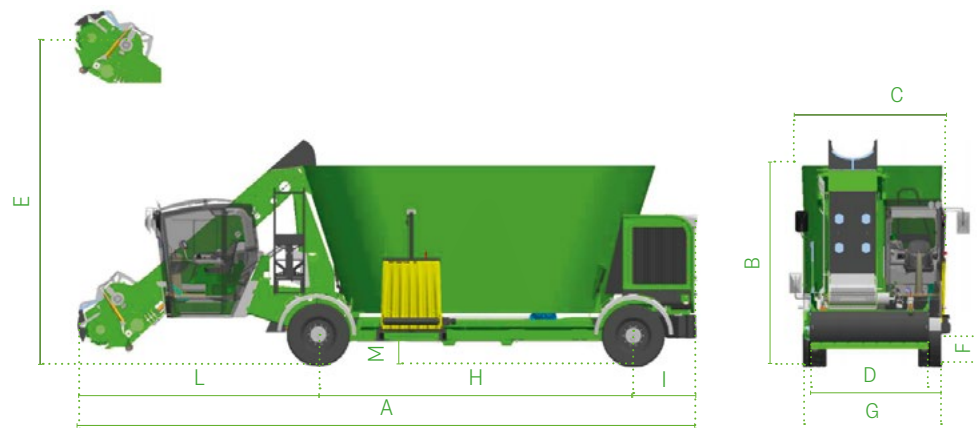

ECOMIX

LEADER PF 2 PLUS		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
VARIKLIS		FPT N45 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V
GALIA	Kw/Ag	125/170	151/205	151/205	151/205	151/205	151/205	151/205	191/260	191/260	191/260
TALPA	m³	18	20	22	22	24	26	26	28	30	33
SVORIS BE KROVINIO	kg	14500	15000	15600	16000	16000	17000	16900	18000	18500	18600
DIDŽIAUSIAS PAJĖGUMAS	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550
[A] BENDRAS ILGIS	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] AUKŠTIS	mm	2700	2870	3030	2870	3190	3430	3310	3390	3500	3720
[C] PLOTIS	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] FREZOS PLOTIS	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] PJOVIMO AUKŠTIS	mm	4935	4920	5310	4920	5310	5600	5400	5600	5600	6560
[F] IŠKROVIMO AUKŠTIS	mm	730	730	730	730	730	770	770	770	770	770
[G] IŠORINIAI RATAI	mm	2385	2385	2385	2385	2385	2400	2400	2400	2400	2400
[H] PROŠVAISA	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] GALINĖ PROJEKCIJA	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] PRIEKINĖ PROJEKCIJA	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] RĖMO AUKŠTIS	mm	370	370	370	370	370	440	440	440	440	440
STANDARTINĖS PADANGOS		435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5

ECOMODE

		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
VARIKLIS		FPT N45 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V	FPT N67 Stage V
GALIA	Kw/Ag	125/170	151/205	151/205	151/205	151/205	151/205	151/205	191/260	191/260	191/260
TALPA	m³	18	20	22	22	24	26	26	28	30	33
SVORIS BE KROVINIO	kg	15100	15500	16100	16300	16500	17000	17400	18000	18500	18600
DIDŽIAUSIAS PAJĖGUMAS	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550
[A] BENDRAS ILGIS	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] AUKŠTIS	mm	2770	2940	3100	2940	3260	3430	3310	3390	3500	3720
[C] PLOTIS	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] FREZOS PLOTIS	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] PJOVIMO AUKŠTIS	mm	5005	4990	5380	5380	5380	5600	5470	5600	5600	6560
[F] IŠKROVIMO AUKŠTIS	mm	770	770	770	770	770	770	770	770	770	770
[G] IŠORINIAI RATAI	mm	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
[H] PROŠVAISA	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] GALINĖ PROJEKCIJA	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] PRIEKINĖ PROJEKCIJA	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] RĖMO AUKŠTIS	mm	440	440	440	440	440	440	440	440	440	440
STANDARTINĖS PADANGOS		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5