


LEADER PF 2 PLUS COMPACT

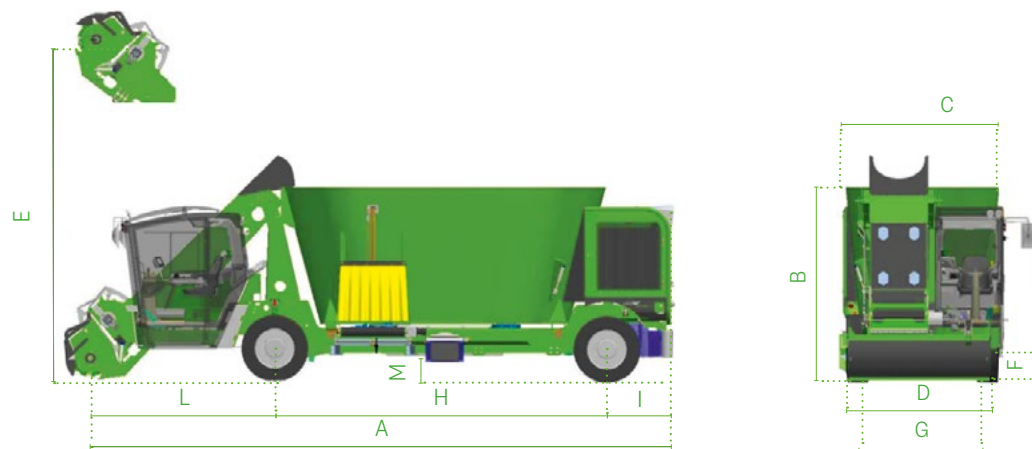

ECOMIX

LEADER PF 2 PLUS		2.12C	2.14C	2.16C
VARIKLIS		FPT N45 Stage V	FPT N45 Stage V	FPT N45 Stage V
GALIA	Kw/Ag	125/170	125/170	125/170
TALPA	m ³	12	14	16
SVORIS BE KROVINIO	kg	12600	12800	13000
DIDŽIAUSIAS PAJĖGUMAS	kg	4200	4900	5600
[A] BENDRAS ILGIS	mm	8750	8680	9180
[B] AUKŠTIS	mm	2530	2770	2965
[C] PLOTIS	mm	2300	2300	2300
[D] FREZOS PLOTIS	mm	2040	2040	2040
[E] PJOVIMO AUKŠTIS	mm	5005	4870	5600
[F] IŠKROVIMO AUKŠTIS	mm	650	650	670
[G] IŠORINIAI RATAI	mm	2165	2165	2235
[H] PROŠVAISA	mm	4730	4730	4730
[I] GALINĖ PROJEKCIJA	mm	960	960	960
[L] PRIEKINĖ PROJEKCIJA	mm	3060	2990	3490
[M] RÉMO AUKŠTIS	mm	400	400	420
STANDARTINĖS PADANGOS		315/60 R22.5	315/60 R22.5	315/60 R22.5

ECOMODE

		2.12C	2.14C	2.16C
		FPT N45 Stage V	FPT N45 Stage V	FPT N45 Stage V
		125/170	125/170	125/170
		12	14	16
		13000	13200	13400
		4200	4900	5600
		8750	8680	9180
		2515	2755	2965
		2300	2300	2300
		2040	2040	2040
		5065	4930	5640
		670	670	710
		2235	2235	2235
		4730	4730	4730
		960	960	960
		3060	2990	3490
		420	420	460
		385/65 R22.5	385/65 R22.5	385/65 R22.5